

## WD-KZ型信号转换放大器


### WD-KZ SIGNAL CONVERTING AMPLIFIER

#### 概述 Introduction

KZ型信号转换器是专为YK系列开关配套使用而设计的信号放大器，其主要目的是为了保证YK系列开关的可靠性、安全性及使用寿命。它能将安装在现场的小容量触点开关转换成更大容量的继电器信号，以确保YK系列开关运行的可靠和安全。当系统回路电压大于36VDC/AC时，建议使用KZ型信号放大器。

KZ signal converting amplifier is designed for YK series switch matched product. It is mainly used to ensure YK series switch stability, safety and long life, it can transfer small spot contact capacity to more capacity relay signal. It can ensure YK series switch ran safely. We suggest you can use KZ signal converting amplifier if system circuit voltage is more than 36VDC/AC.

#### KZ型信号转换器面板 Panel

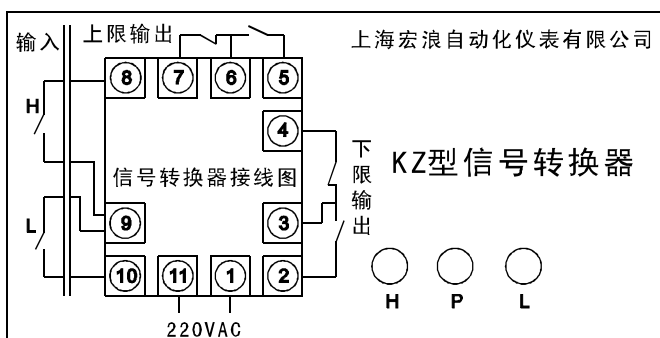

#### KZ型信号转换器技术指标 Technical order

- 供电电压Power supply: 220VAC $\pm$ 10%
- 输入节点数Input signal: 二个
- 输出触点容量Output contact capacity: 220VAC, 10A
- 输出触点形式:  
一常开一常闭A set of normal open and close  
(指对应的每个输入点corresponding each input)
- 外形尺寸Outline dimension: 50 $\times$ 100 $\times$ 85 (mm)

#### KZ型信号转换器外形尺寸图 KZ signal converting amplifier o

